

TECHNICAL SPECIFICATION

Auxiliary contact block TM2 AE11- front mounting




Description

It is designed to switch on operational systems or signalization. Designed with one NO and one NC contact. It changes the position of its contacts according to the position of the breaker (switched on/off) to which it is mounted.

Technical data

- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: $-10^{\circ}\text{C} \div + 65^{\circ}\text{C}$
- Altitude: up to 2000m
- Mounting: laterally to a breaker TM2-Exx

Dimensions:

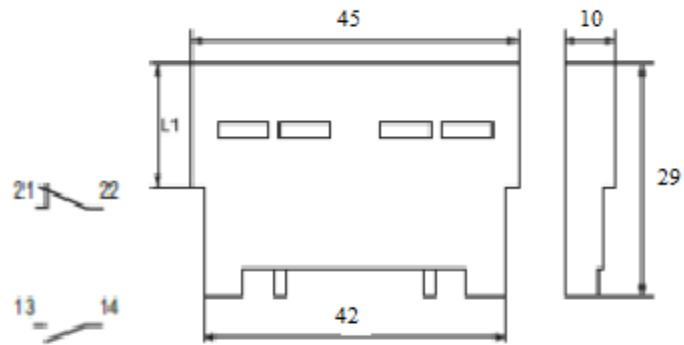

Variant:

Type	Catalogue number
TM2 AE11	48912

Standards: EN 60947-1:2007
EN 60947-5-1:2004

